

2 - Configuring the EV Charger

< EV Device

Device Details

Name: WattPilot

ID: 0000-0001-00

Settings

Name *

WattPilot

Phases *

1

Connectors *

1

Current I (A) *

32

Scroll
down

Setup Information

Full URL:

wss://ocpp0.edde.world/ocpp16/0000-0001-00



Base URL: wss://ocpp0.edde.world/ocpp16



OCPP ID: 0000-0001-00




The Ocular IQ Solar needs this value in particular.

Other Actions

Remove Device >

 Update Device


2 - Configuring the EV Charger... continued

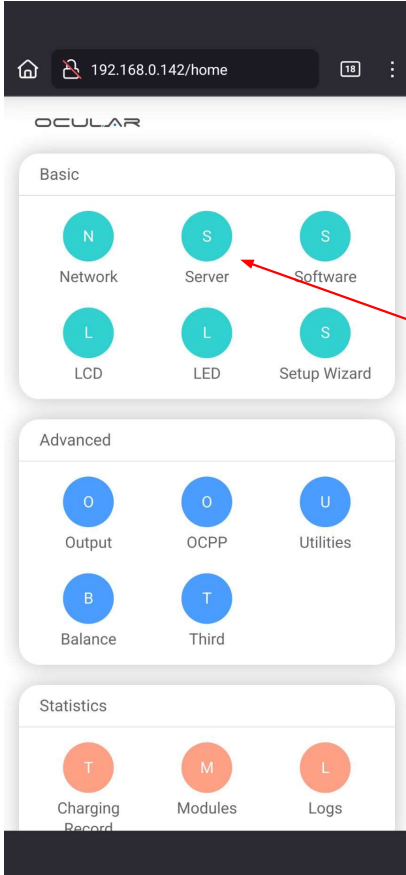

Log into the Ocular IQ Solar.

Tap on the **Server** button.

2 - Configuring the EV Charger... continued

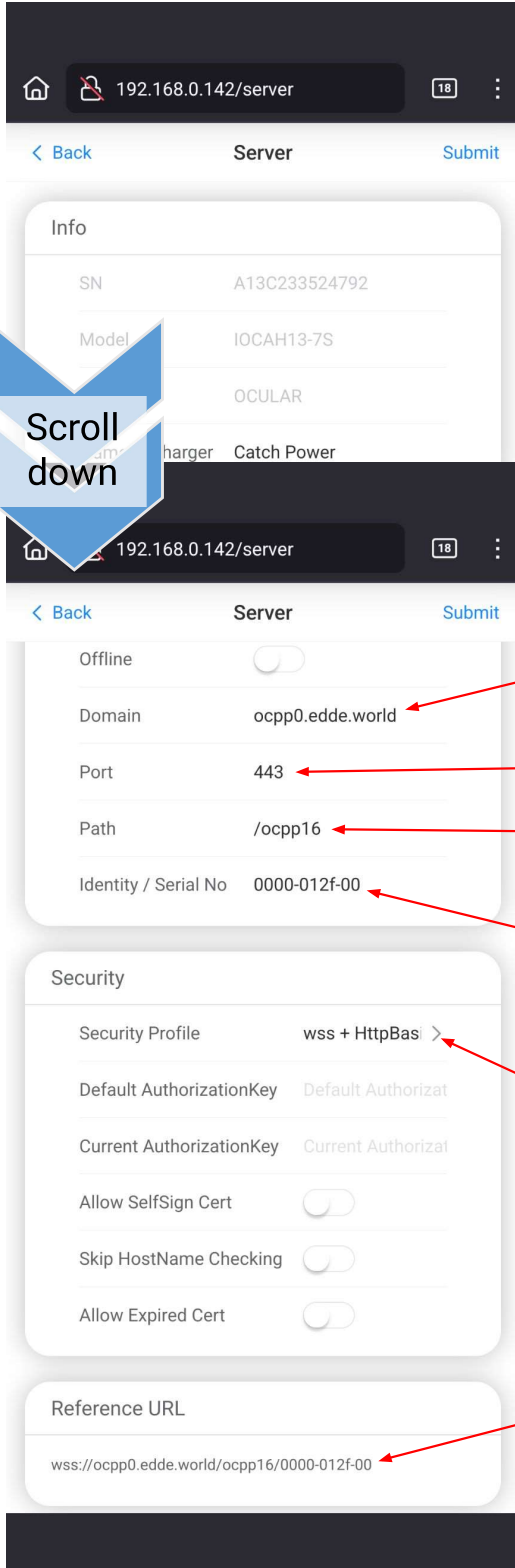

192.168.0.142/server

< Back Server Submit

Info

SN A13C233524792

Model IOCAH13-7S

OCULAR

Charger Catch Power

Scroll down

192.168.0.142/server

< Back Server Submit

Offline

Domain ocpp0.edde.world

Port 443

Path /ocpp16

Identity / Serial No 0000-012f-00

Security

Security Profile wss + HttpBasic >

Default AuthorizationKey Default Authorizat

Current AuthorizationKey Current Authorizat

Allow SelfSign Cert

Skip HostName Checking

Allow Expired Cert

Reference URL

wss://ocpp0.edde.world/ocpp16/0000-012f-00

Set Domain to **ocpp0.edde.world**

Set Port to **443**


Set Path to **/ocpp16**

Set **Identity/Serial No** to the OCPP ID you copied from the Configurator

Set **Security Profile** to **wss + HttpBasic**

Reference URL should be **wss://ocpp0.edde.world/ocpp16/**, followed by your OCPP ID


2 - Configuring the EV Charger... continued

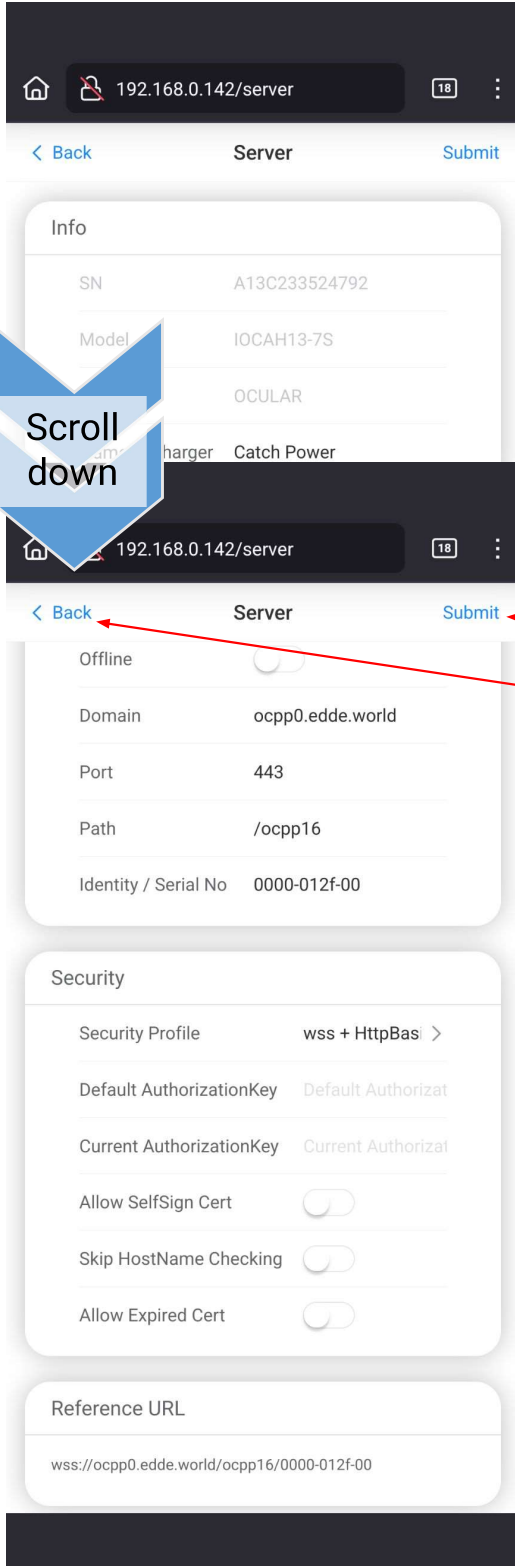

Tap **Submit**


Tap **Back**

2 - Configuring the EV Charger... continued

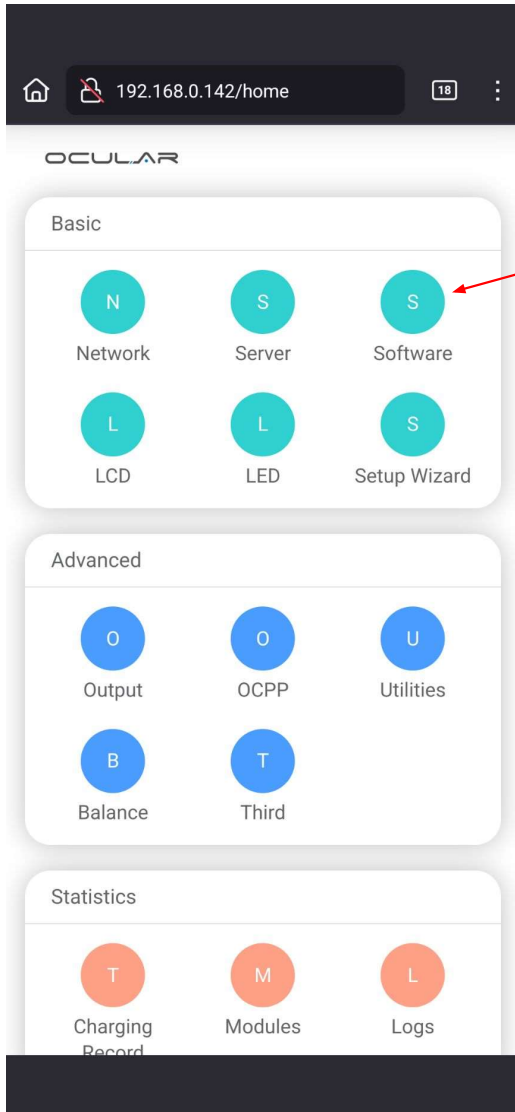

Tap **Software**

2 - Configuring the EV Charger... continued

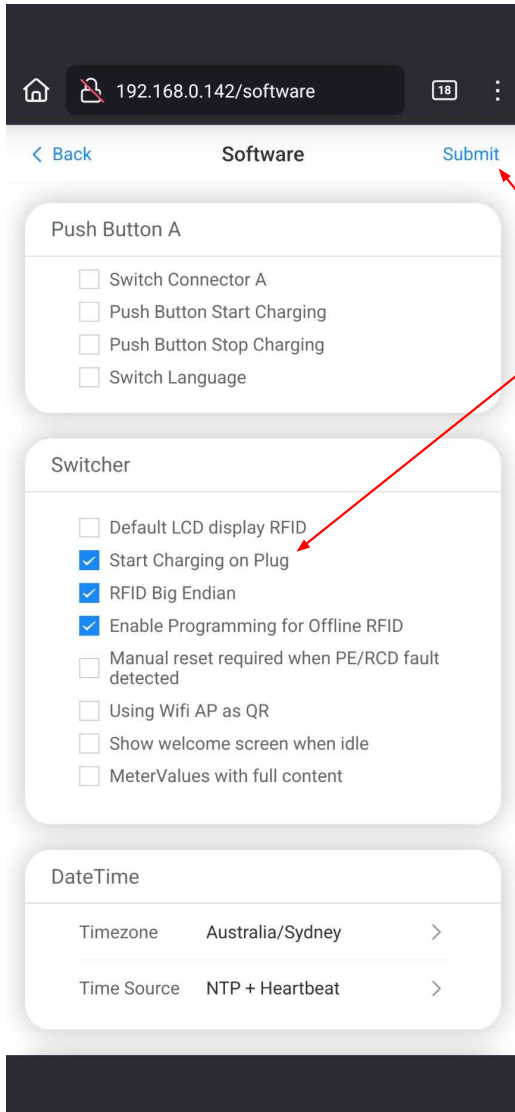

Turn on **Start Charging on Plug**

Tap **Submit**