

2 - Configuring the EV Charger

< EV Device

Device Details

Name: WattPilot

ID: 0000-0001-00

Settings

Name *

WattPilot

Phases *

1

Connectors *

1

Current I (A) *

32

Scroll
down

Setup Information

Full URL:

wss://ocpp0.edde.world/ocpp16/0000-0001-00



Base URL wss://ocpp0.edde.world/ocpp16



OCPP ID: 0000-0001-00




The Schneider Charge needs these values in particular.

Other Actions

Remove Device >

 Update Device

2 - Configuring the EV Charger... continued

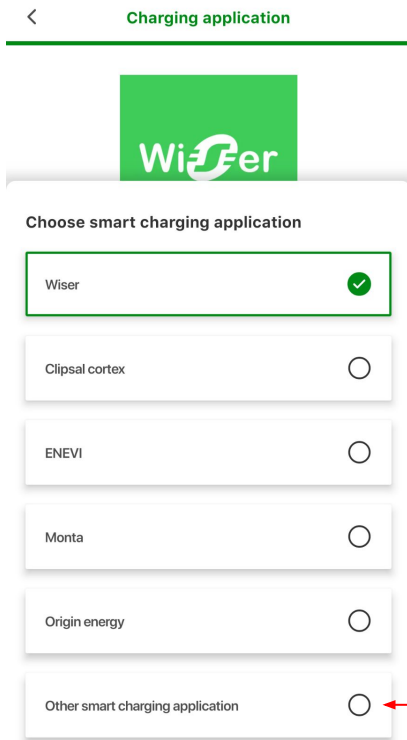


Schneider has a good setup process using their eSetup app.

Follow the app's instructions until you reach a screen like the one shown, where you are asked to select a smart charging application.

Scroll to the bottom, and tap **Other smart charging application.**

2 - Configuring the EV Charger... continued

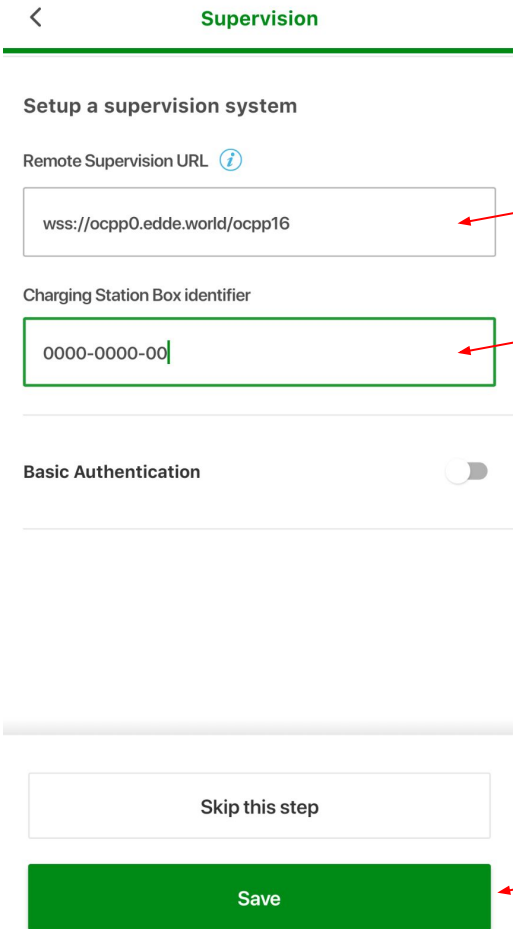

< Supervision

Setup a supervision system

Remote Supervision URL ⓘ

wss://ocpp0.edde.world/ocpp16

Charging Station Box identifier

0000-0000-00

Basic Authentication

Skip this step

Save

Paste the **Base URL** from the Configurator here.

Paste the **OCPP ID** from the Configurator here.

Tap **Save**.

The eSetup app will guide you through the rest of the commissioning process.